



电气化铁路复合绝缘子 Composite Railway Insulator

本产品适用于运行条件复杂的电气化铁路隧道，能有效地防止污闪事故，减少清扫维护工作量。由于其尺寸小，特别是在隧道净空较小时，是瓷、玻璃绝缘子无法替代的产品。


The product is applicable for electrified railway tunnel in complex environment, can effectively prevent pollution flashover and reduce cleaning and maintenance. Its feature of small dimension makes it never substituted by porcelain or glass insulator, especially under low tunnel clearance.

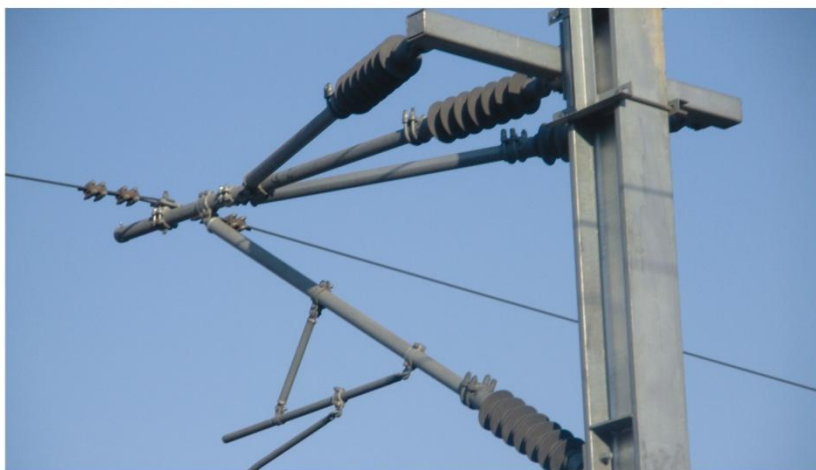


产品型号说明 Model Description

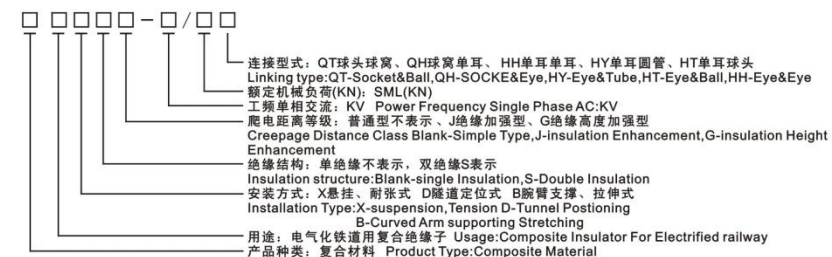


主要技术Main Technical Parameters

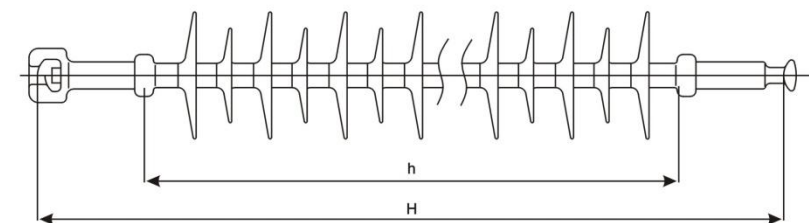


图形(Drg)1

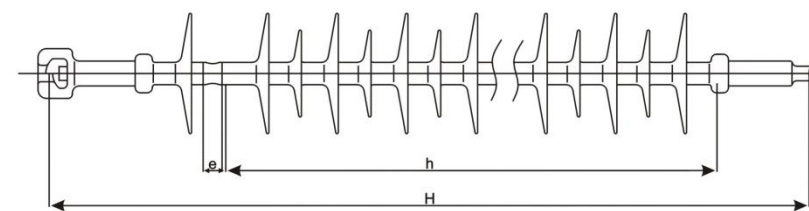

图形(Drg)2

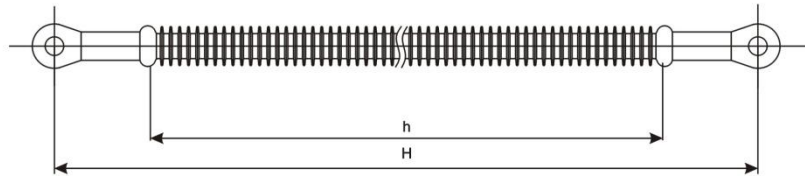


图形(Drg)3

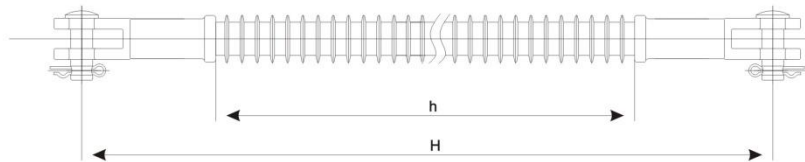


图形(Drg)4

绝缘子 型号 Type	额定电压 Rated Voltage (KV)	结构高度 section Length H (mm)	额定弯曲 负荷 specified Bending load (KN)	最小电弧 距离 Min Arcing Distance h(mm)	最小公称 爬电距离 Min Nominal Creepage Distance L (mm)	雷电冲击 耐受电压 (峰值) 不小于kV Lightning Impulse Withstand Voltage (Peak Value) ≥kV	工频干 耐受电压 P.F.dry Withstand Voltage min. (RMS)(kV)	工频湿 耐受电压 (有效值) P.F.Wetstand Voltage min. (RMS) (kV)	结构图号 Drg No.
FQX-25/100	25	800 ± 15	100	600	1600	310	190	150	1
FQXS-25/100	25	890 ± 15	100	600	1600/145	310	190	150	2
FQX-25/120	25	700 ± 15	120	500	1200	270	160	130	1
FQX-25/120	25	700 ± 15	120	500	1600	270	160	130	2
FQX-25/160	25	850 ± 15	160	600	1600	310	190	150	1
FQXS-25/160	25	940 ± 15	160	600	1600/145	310	190	150	2
FQX-25/120HH	25	1000	120	760	1600	310	190	150	3
FQHC-1.5/120	1.5	1200	120	100	320	60	30	23	4

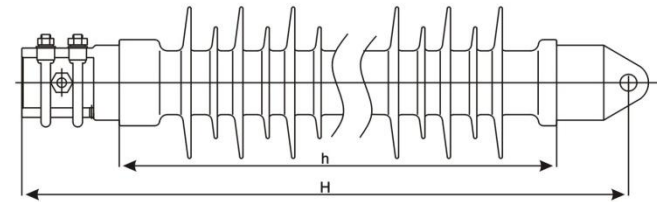

图形(Drg)5

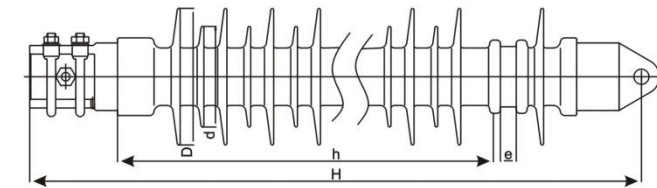

图形(Drg)6

绝缘子 型号 Type	额定电压 Rated Voltage (KV)	结构高度 section Length H (mm)	额定弯曲 负荷 specified Bending load (KN)	额定拉 伸负荷 Specified Tension Load (kN)	最小电弧 距离 Min Arcing Distance h(mm)	最小公称 爬电距离 Min Nominal Creepage Distance L(mm)	雷电冲击 耐受电压 (峰值) 不小于kV Lightning Impulse Withstand Voltage (Peak Value) ≥kV	工频干 耐受电压 P.F.dry Withstand Voltage min. (RMS)(kV)	工频湿 耐受电压 (有效值) P.F.Wetstand Voltage min. (RMS) (kV)	结构图号 Drg No.
FQBSG-25/16	25	890	16	120	520/58	1600/145	310	190	150	6
FQBG-25/16	25	800	16	120	520	1600	310	190	150	5
FQBSG-25/12	25	890	12	100	520/58	1600/145	310	190	150	6
FQBG-25/12	25	800	12	100	520	1600	310	190	150	5
FQBJ-25/12	25	760	12	100	490	1600	310	190	150	5
FQBSG-25/8	25	890	8	80	520/58	1600/145	310	190	150	6
FQBG-25/8	25	800	8	80	520	1600	310	190	150	5
FQBJ-25/8	25	760	8	80	490	1600	310	190	150	5

注：可以根据客户图纸或技术要求订做。
We can design and manufacture according to customers' drawing and requirement.